



LN<int>* x



remove

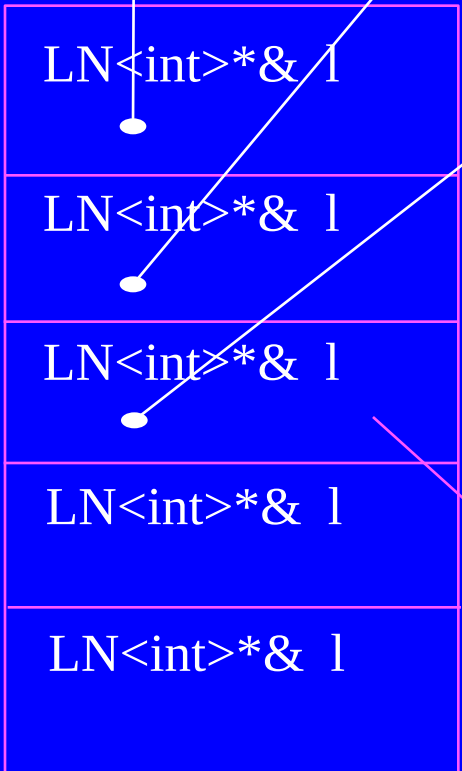

In the call **remove** (**x**, 7), **l** is a reference initially to variable **x** and then in recursive calls to subsequent **next** instance variables in **LN<T>**, until **l->value** (last one shown) is == **to_remove**

```
LN<T>* to_delete = l;  
l = l->next;  
delete to_delete;
```