

First-Order Logic Semantics

Reading: Chapter 8, ~~9.1-9.2, 9.5.1-9.5.5~~

FOL Syntax and Semantics read: 8.1-8.2

FOL Knowledge Engineering read: 8.3-8.5

~~FOL Inference read: Chapter 9.1-9.2, 9.5.1-9.5.5~~

(Please read lecture topic material before and after each
lecture on that topic)

Outline

- Propositional Logic is **Useful** --- but has **Limited Expressive Power**
- First Order Predicate Calculus (FOPC), or First Order Logic (FOL).
 - FOPC has greatly expanded expressive power, though still limited.
- New Ontology
 - The world consists of OBJECTS (for propositional logic, the world was facts).
 - OBJECTS have PROPERTIES and engage in RELATIONS and FUNCTIONS.
- New Syntax
 - Constants, Predicates, Functions, Properties, Quantifiers.
- New Semantics
 - Meaning of new syntax.
- Knowledge engineering in FOL
- ~~Inference in FOL~~

You will be expected to know

- FOPC syntax and semantics
 - Syntax: Sentences, predicate symbols, function symbols, constant symbols, variables, quantifiers
 - Semantics: Models, interpretations
- De Morgan's rules for quantifiers
 - connections between \forall and \exists
- Nested quantifiers
 - Difference between " $\forall x \exists y P(x, y)$ " and " $\exists x \forall y P(x, y)$ "
 - $\forall x \exists y \text{ Likes}(x, y)$
 - $\exists x \forall y \text{ Likes}(x, y)$
- Translate simple English sentences to FOPC and back
 - $\forall x \exists y \text{ Likes}(x, y) \Leftrightarrow$ "Everyone has someone that they like."
 - $\exists x \forall y \text{ Likes}(x, y) \Leftrightarrow$ "There is someone who likes every person."

Outline


- Review: $KB \models S$ is equivalent to $\models (KB \Rightarrow S)$
 - So what does $\{ \} \models S$ mean?
- Review: Follows, Entails, Derives
 - Follows: “Is it the case?”
 - Entails: “Is it true?”
 - Derives: “Is it provable?”
- Semantics of FOL (FOPC)
 - Model, Interpretation

FOL (or FOPC) Ontology:

What kind of things exist in the world?

What do we need to describe and reason about?

Objects --- with their relations, functions, predicates, properties, and general rules.

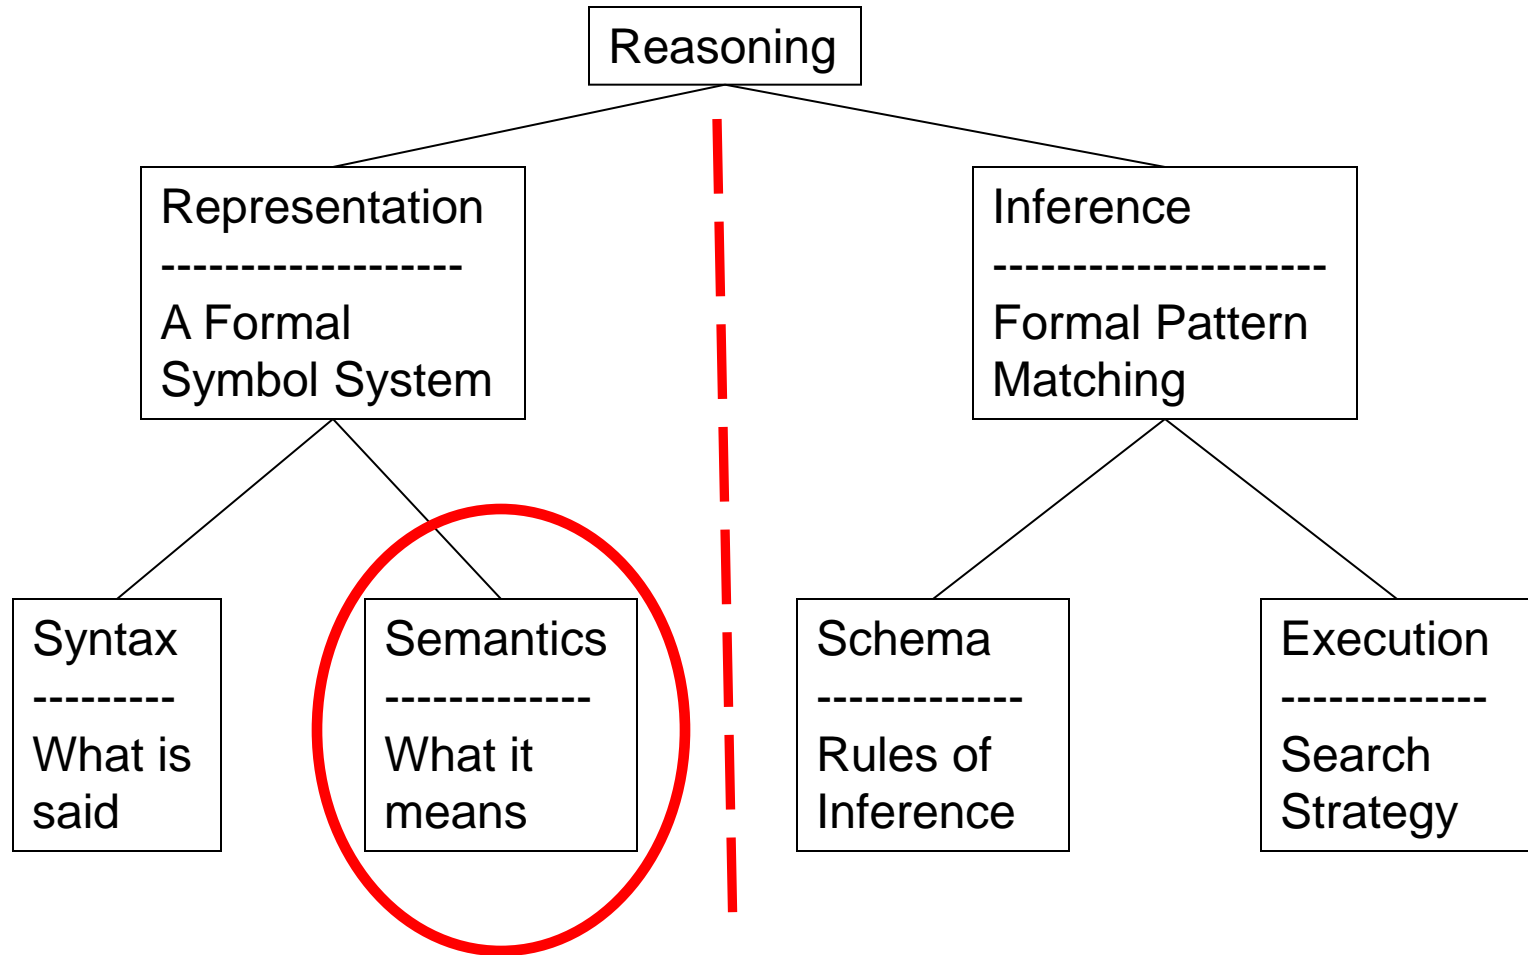

Review: $KB \models S$ means $\models (KB \Rightarrow S)$

- $KB \models S$ is read "KB entails S."
 - Means "S is true in every world (model) in which KB is true."
 - Means "In the world, S follows from KB."
- $KB \models S$ is equivalent to $\models (KB \Rightarrow S)$
 - Means "(KB \Rightarrow S) is true in every world (i.e., is valid)."
- And so: $\{\} \models S$ is equivalent to $\models (\{\} \Rightarrow S)$
- So what does $(\{\} \Rightarrow S)$ mean?
 - Means "True implies S."
 - Means "S is valid."
 - In Horn form, means "S is a fact." p. 256 (3rd ed.; p. 281, 2nd ed.)
- **Why does $\{\}$ mean True here,
but means False in resolution proofs?**

Review: (True \Rightarrow S) means "S is a fact."

- By convention,
 - The null conjunct is "syntactic sugar" for True.
 - The null disjunct is "syntactic sugar" for False.
 - Each is assigned the truth value of its identity element.
 - For conjuncts, True is the identity: $(A \wedge \text{True}) \equiv A$
 - For disjuncts, False is the identity: $(A \vee \text{False}) \equiv A$
- A KB is the conjunction of all of its sentences.
 - So in the expression: $\{\} \models S$
 - We see that $\{\}$ is the null conjunct and means True.
 - The expression means "S is true in every world where True is true."
 - I.e., "S is valid."
 - Better way to think of it: $\{\}$ does not exclude any worlds (models).
- In Conjunctive Normal Form each clause is a disjunct.
 - So in, say, $\text{KB} = \{ (P \vee Q) (\neg Q \vee R) (\neg X \vee Y \vee \neg Z) \}$
 - We see that $(\neg X \vee Y \vee \neg Z)$ is the null disjunct and means False.

Side Trip: Functions AND, OR, and null values (Note: These are “syntactic sugar” in logic.)

function AND(*arglist*) **returns** a truth-value
 return ANDOR(*arglist*, True)

function OR(*arglist*) **returns** a truth-value
 return ANDOR(*arglist*, False)

function ANDOR(*arglist*, *nullvalue*) **returns** a truth-value
 /* *nullvalue* is the identity element for the caller. */
 if (*arglist* = { })
 then return *nullvalue*
 if (FIRST(*arglist*) = NOT(*nullvalue*))
 then return NOT(*nullvalue*)
 return ANDOR(REST(*arglist*), *nullvalue*)

**Side Trip: We only need one logical connective.
(Note: AND, OR, NOT are “syntactic sugar” in logic.)**

Both NAND and NOR are logically complete.


- **NAND is also called the “Sheffer stroke”**
- **NOR is also called “Pierce’s arrow”**

$$(\text{NOT } A) = (\text{NAND } A \text{ TRUE}) = (\text{NOR } A \text{ FALSE})$$

$$\begin{aligned}(\text{AND } A \text{ B}) &= (\text{NAND TRUE (NAND } A \text{ B)}) \\ &= (\text{NOR (NOR } A \text{ FALSE) (NOR } B \text{ FALSE)})\end{aligned}$$




$$\begin{aligned}(\text{OR } A \text{ B}) &= (\text{NAND (NAND } A \text{ TRUE) (NAND } B \text{ TRUE)}) \\ &= (\text{NOR FALSE (NOR } A \text{ B)})\end{aligned}$$

Review: Schematic for Follows, Entails, and Derives

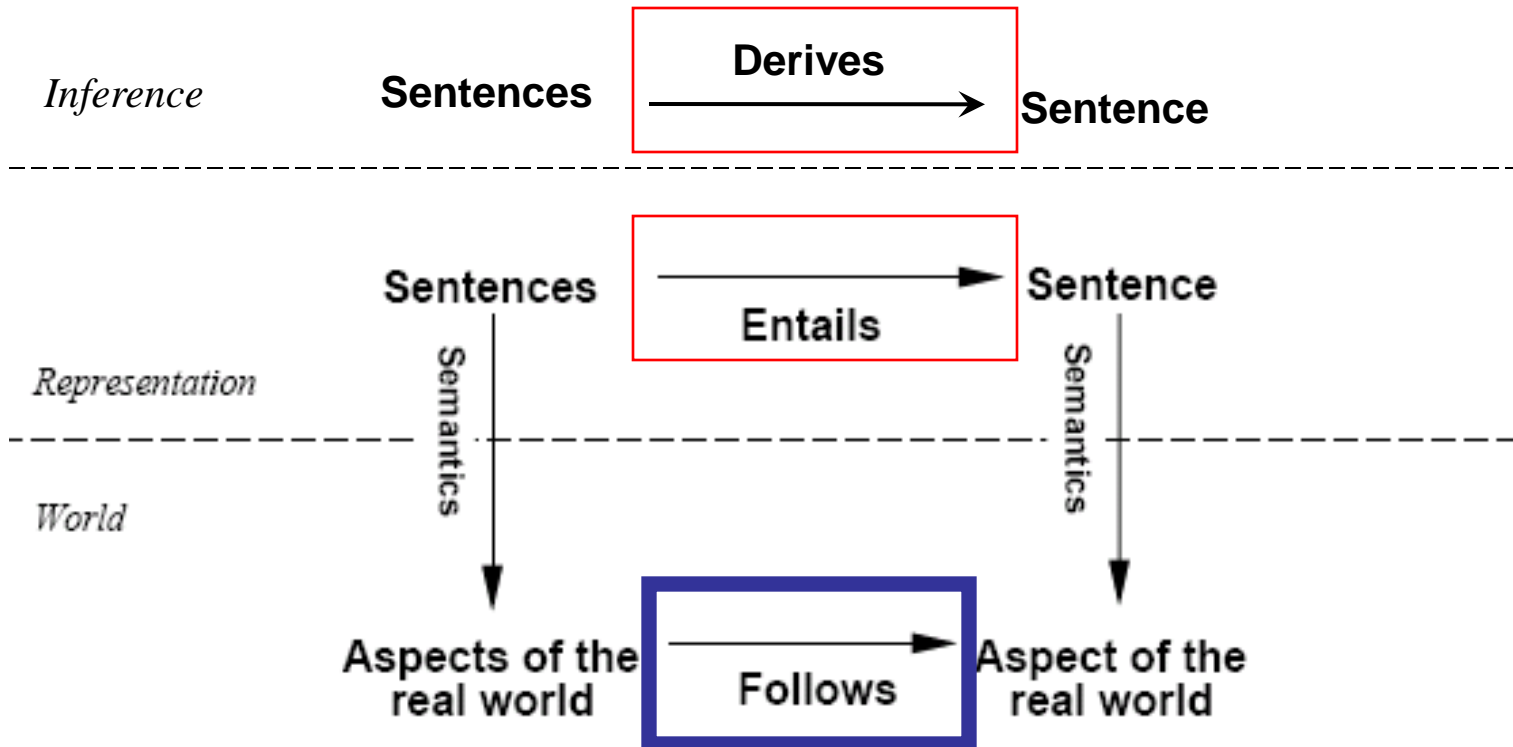


*If KB is true in the real world,
then any sentence α entailed by KB
and any sentence α derived from KB
by a sound inference procedure
is also true in the real world.*

Schematic Example: Follows, Entails, and Derives

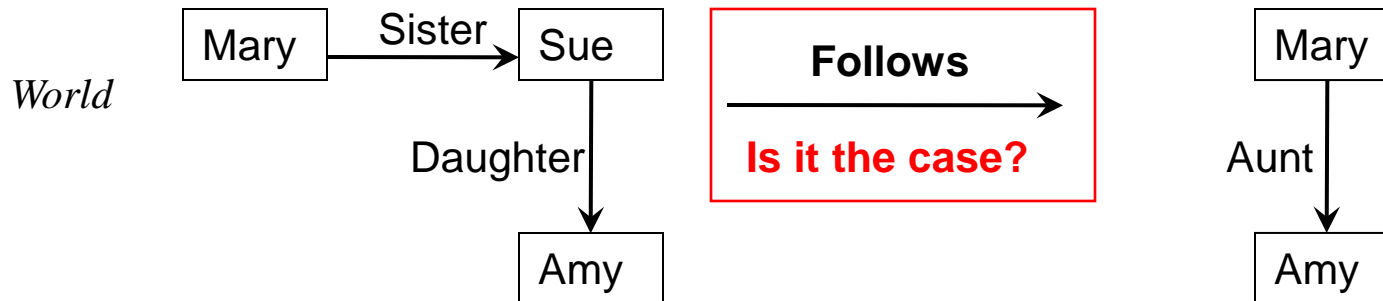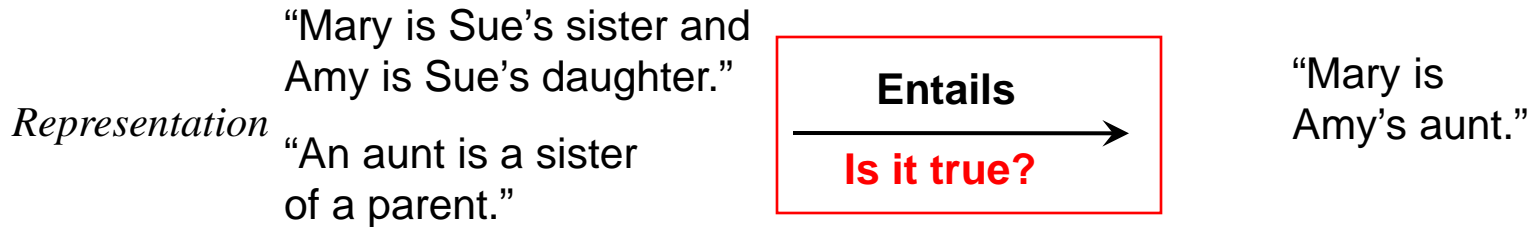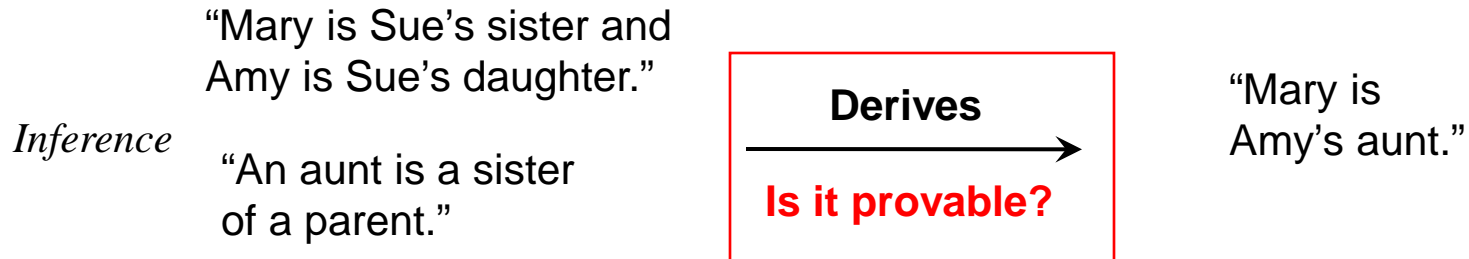

Review: Models (and in FOL, Interpretations)

- **Models** are formal worlds in which truth can be evaluated
- We say m is a **model of** a sentence a if a is true in m
- $M(a)$ is the set of all models of a
- Then $KB \models a$ iff $M(KB) \subseteq M(a)$
 - E.g. KB , = "Mary is Sue's sister and Amy is Sue's daughter."
 - a = "Mary is Amy's aunt."
- Think of KB and a as constraints, and of models m as possible states.
- $M(KB)$ are the solutions to KB and $M(a)$ the solutions to a .
- Then, $KB \models a$, i.e., $\models (KB \Rightarrow a)$, when all solutions to KB are also solutions to a .

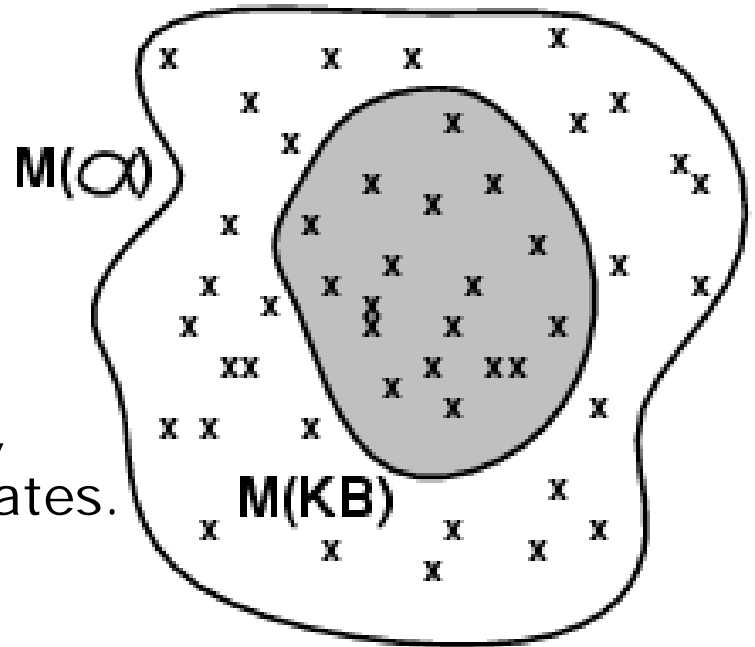

Semantics: Worlds

- **The world consists of** objects **that have** properties.
 - **There are** relations **and** functions **between these objects**
 - **Objects in the world, individuals:** people, houses, numbers, colors, baseball games, wars, centuries
 - Clock A, John, 7, the-house in the corner, Tel-Aviv, Ball43
 - **Functions** on individuals:
 - father-of, best friend, third inning of, one more than
 - **Relations:**
 - brother-of, bigger than, inside, part-of, has color, occurred after
 - **Properties (a relation of arity 1):**
 - red, round, bogus, prime, multistoried, beautiful

Semantics: Interpretation

- An **interpretation** of a sentence (wff) is an assignment that maps
 - Object constant symbols to objects in the world,
 - n-ary function symbols to n-ary functions in the world,
 - n-ary relation symbols to n-ary relations in the world
- Given an interpretation, an atomic sentence has the value “true” if it denotes a relation that holds for those individuals denoted in the terms. Otherwise it has the value “false.”
 - Example: Kinship world:
 - Symbols = Ann, Bill, Sue, Married, Parent, Child, Sibling, ...
 - World consists of individuals in relations:
 - Married(Ann,Bill) is false, Parent(Bill,Sue) is true, ...


Truth in first-order logic

- Sentences are true with respect to a **model** and an **interpretation**
- Model contains objects (**domain elements**) and relations among them
- Interpretation specifies referents for
 - constant symbols** → **objects**
 - predicate symbols** → **relations**
 - function symbols** → **functional relations**
- An atomic sentence $predicate(term_1, \dots, term_n)$ is true iff the **objects** referred to by $term_1, \dots, term_n$ are in the **relation** referred to by $predicate$

Semantics: Models

- **An interpretation satisfies a wff (sentence) if the wff has the value “true” under the interpretation.**
- **Model: A domain and an interpretation that satisfies a wff is a model of that wff**
- **Validity: Any wff that has the value “true” under all interpretations is valid**
- **Any wff that does not have a model is inconsistent or unsatisfiable**
- **If a wff w has a value true under all the models of a set of sentences KB then KB logically entails w**

Models for FOL: Example

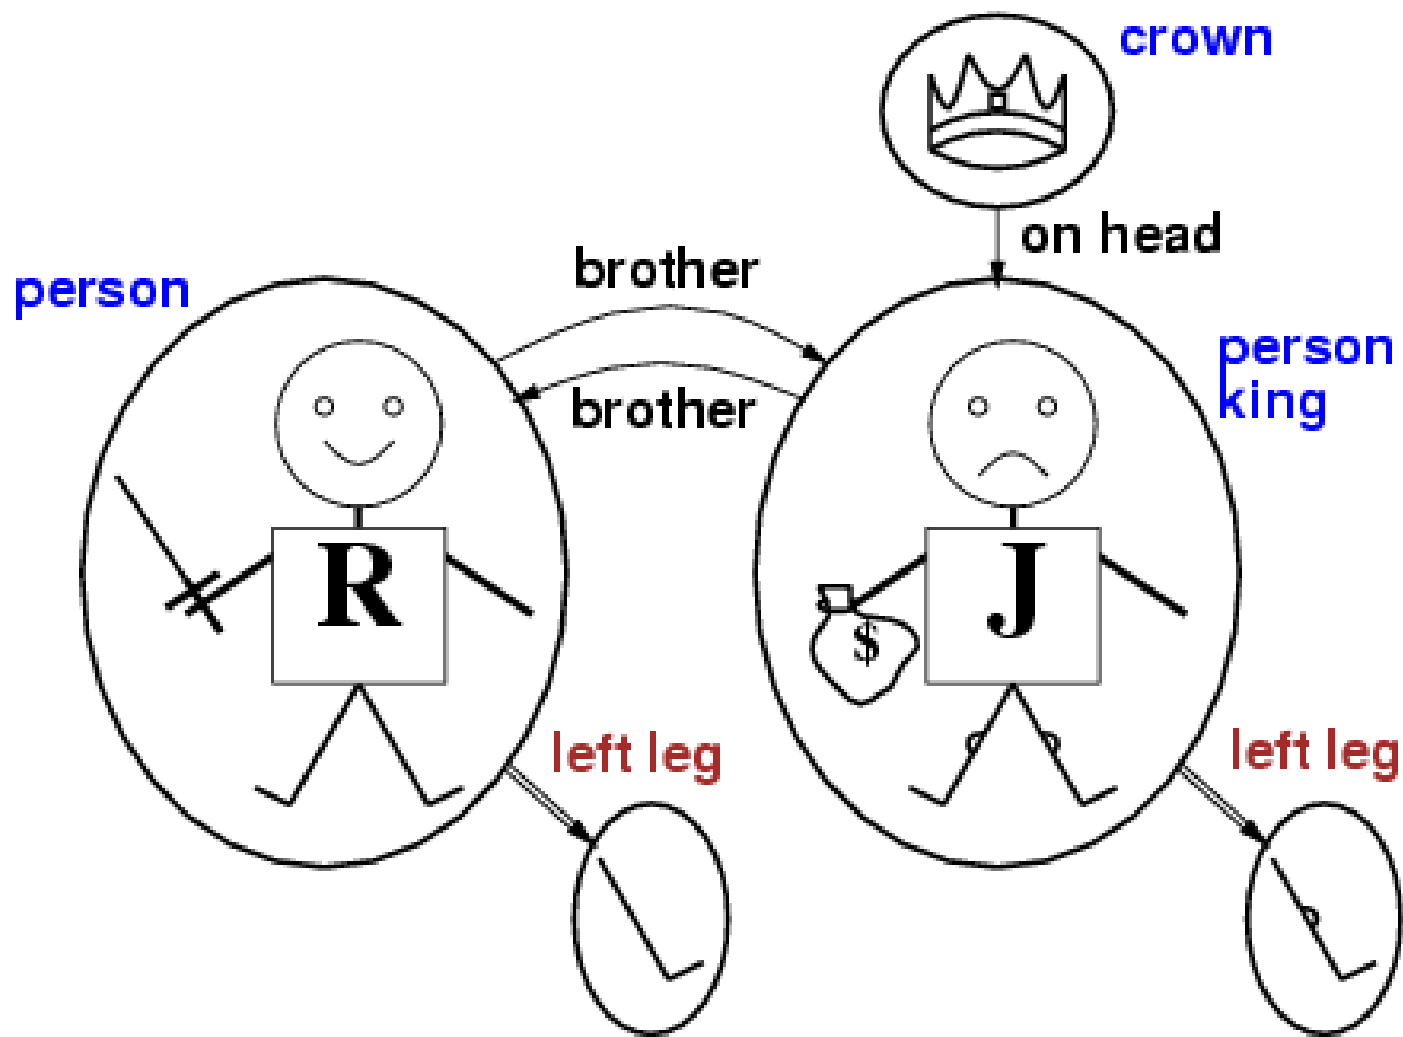


FOL (or FOPC) Ontology:

What kind of things exist in the world?

What do we need to describe and reason about?

Objects --- with their relations, functions, predicates, properties, and general rules.

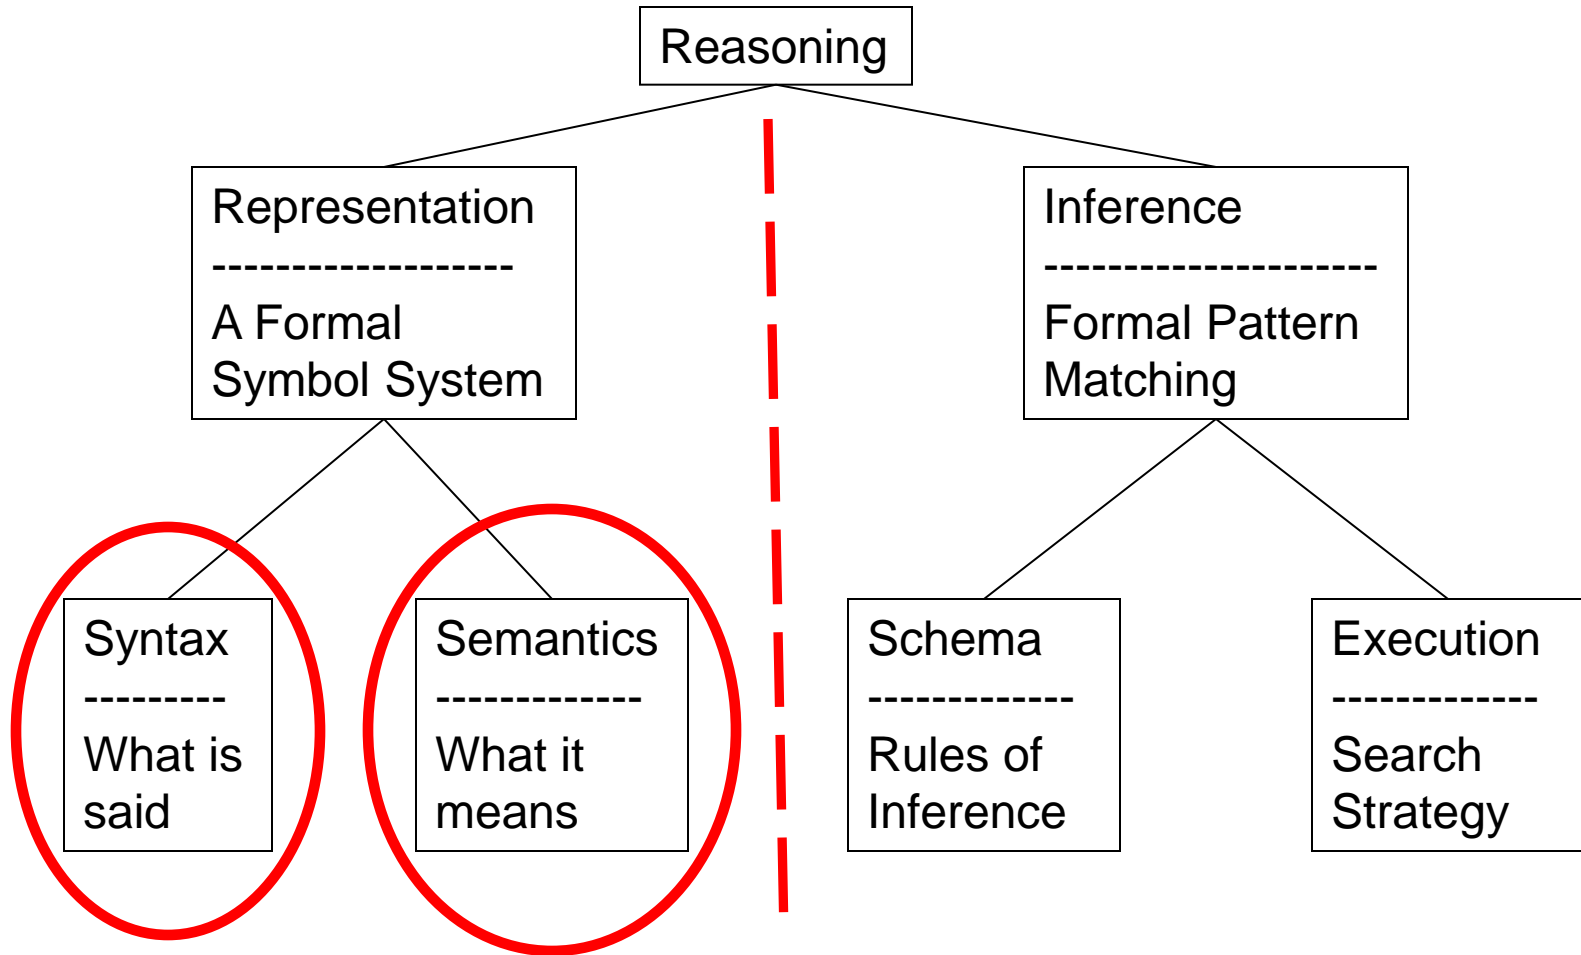

Summary

- First-order logic:
 - Much more expressive than propositional logic
 - Allows objects and relations as semantic primitives
 - Universal and existential quantifiers
- Syntax: constants, functions, predicates, equality, quantifiers
- Nested quantifiers
- Translate simple English sentences to FOPC and back